

Test report for
47 CFR Part 15 Subpart B
ICES-Gen, ICES-003

Test report No. : P000317395 001 Ver 1.0



Product name : Telraam S2
Applicant : Rear Window

Laboratory information

Accreditation

Kiwa Nederland B.V. complies with the accreditation criteria for test laboratories as laid down in ISO/IEC 17025:2017. The accreditation covers the quality system of the laboratory as well as the specific activities as described in the authorized annex bearing the accreditation number L248 and is granted by the Dutch Council For Accreditation (RvA: Raad voor Accreditatie).

Kiwa Nederland B.V. is designated by the FCC as an Accredited Test Firm for compliance testing of equipment subject to Certification under Parts 15 & 18. The Designation number is: NL0001.

Kiwa Nederland B.V. is a Wireless Device Testing laboratory recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements.

The Industry Canada company number for Kiwa Nederland B.V. is: 4173A. The CABID is NL0001.

Kiwa Nederland B.V. is a registered Conformity Assessment body (CAB) under the Japan-EC MRA (Agreement on Mutual Recognition between Japan and the European Community). The registration number is: 201.

Documentation

The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 10 years at Kiwa Nederland B.V.

Testing Location

Test Site	Kiwa Nederland B.V.
Test Site location	Wilmersdorf 50 7327 AC Apeldoorn The Netherlands Tel. +31 88998 3393
Test Site FCC	NL0001
CABID	NL0001

Revision History

Version	Date	Remarks	By
v0.50	19-09-2023	First draft	AB
v1.00	09-01-2023	Final release	AB

Table of Contents

Revision History	2
1 General Description	6
1.1 Applicant	6
1.2 Manufacturer	6
1.3 Tested Equipment Under Test (EUT).....	6
1.4 Product specifications of Equipment under test.....	8
1.5 Environmental conditions	8
1.6 Measurement standards	8
1.7 Applicable standards.....	8
1.8 Observation and remarks.....	8
1.9 Conclusions	9
2 Test configuration of the Equipment Under Test	10
2.1 Test mode	10
2.2 Test setups	10
2.2.1 Radiated emissions test setup 30 MHz - 1 GHz	10
2.2.2 Radiated emissions test setup above 1 GHz	10
2.2.3 AC Power line conducted emissions test setup	11
2.3 Test methodology.	12
2.4 Equipment modifications.	12
2.5 Equipment used in the test configuration	13
2.6 Sample calculations.....	13
3 Test results	14
3.1 Radiated spurious emissions.....	14
3.1.1 Limit	14
3.1.2 Measurement instruments	14
3.1.3 Test setup	14
3.1.4 Test procedure.....	15
3.1.5 Measurement Uncertainty	15
3.1.6 Plots of the Radiated Spurious Emissions Measurement	16
3.2 AC Power-line conducted emissions	22
3.2.1 Limit	22
3.2.2 Measurement instruments	22
3.2.3 Test setup	22
3.2.4 Test procedure.....	22
3.2.5 Test results and plots of the AC power-line conducted measurement	22
3.2.6 Measurement uncertainty	22
3.2.7 Plots of the AC mains conducted spurious measurement.....	23
4 Sample calculations	25

5	Photograph test setup.....	27
5.1	Photograph test setup Radiated Emissions.....	27

Summary of Test results

FCC	ISED	Description	Section in report	Verdict
15.109 (a)	ICES-003 Table 2	Radiated spurious emissions < 1GHz	3.1	Pass
15.109 (a)	ICES-003 Table 4	Radiated spurious emissions > 1GHz	3.1	Pass
15.107 (c)	ICES-003 Table 1	AC power-line conducted emissions	3.2	Pass

Decision rule: Pass/Fail decisions are based on measurement results without taking into account measurement uncertainty.

1 General Description

1.1 Applicant

Client name:	Rear Window
Address:	Diestsesteenweg 71 Leuven
Zip code:	3010
Telephone:	0032 494 78 18 20
E-mail:	kris.vanherle@telraam.net
Contact name:	Kris Vanherle

1.2 Manufacturer

Manufacturer name:	Bytelab
Address:	Medarska 69/1, Zagreb
Zip code:	10090
Telephone:	+385 91 951 2006
E-mail:	puskarj@byte-lab.com
Contact name:	Josip Puskar

1.3 Tested Equipment Under Test (EUT)

Product name:	Telraam S2
Brand name:	Telraam
Product type:	traffic counting device
Model(s):	S2
Batch and/or serial No.	--
Software version:	--
Hardware version:	--
Date of receipt	09-06-2023
Tests started:	09-06-2023
Testing ended:	09-06-2023

Auxiliary items

AUX1

Product name:	Power supply for EUT
Brand name:	Shenzhen Keyuantai Industrial Co., Ltd
Product type:	AC/DC Adaptor USB-C
Model(s):	KYTW825A
Batch and/or serial No.	-
Remarks:	Connects to EUT

1.4 Product specifications of Equipment under test

Commercial name of EUT	Telraam S2
Description	traffic counting device
Brand name	Telraam
Model or type	S2

Disclaimer: above info is declared by the applicant

The EUT is considered as a Class B device.

1.5 Environmental conditions

Test date	09-06-2023
Ambient temperature	23.7°
Humidity	45.9%

1.6 Measurement standards

- ANSI C63.4:2014

1.7 Applicable standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart B
- ICES-003 Issue 7
- ICES-Gen Issue 2

1.8 Observation and remarks

None

1.9 Conclusions

The sample of the product showed **NO NON-COMPLIANCES** to the specifications stated in paragraph 1.8 of this report.

The results of the test as stated in this report, are exclusively applicable to the product items as identified in this report. Kiwa Nederland B.V. accepts no responsibility for any properties of product items in this test report, which are not supported by the tests as specified in paragraph 1.8 "*Applicable standards*".

All tests are performed by:

Name : A.Bos

Review of test methods and report by:

Name : R. van Barneveld

The above conclusions have been verified by the following signatory:

Date : 26-01-2024

Name : ing. R. van Barneveld

Function : Test Engineer

Signature :

A handwritten signature in blue ink, consisting of a stylized 'R' followed by several horizontal strokes.


2 Test configuration of the Equipment Under Test

2.1 Test mode


Tested in normal operation

2.2 Test setups

2.2.1 Radiated emissions test setup 30 MHz - 1 GHz

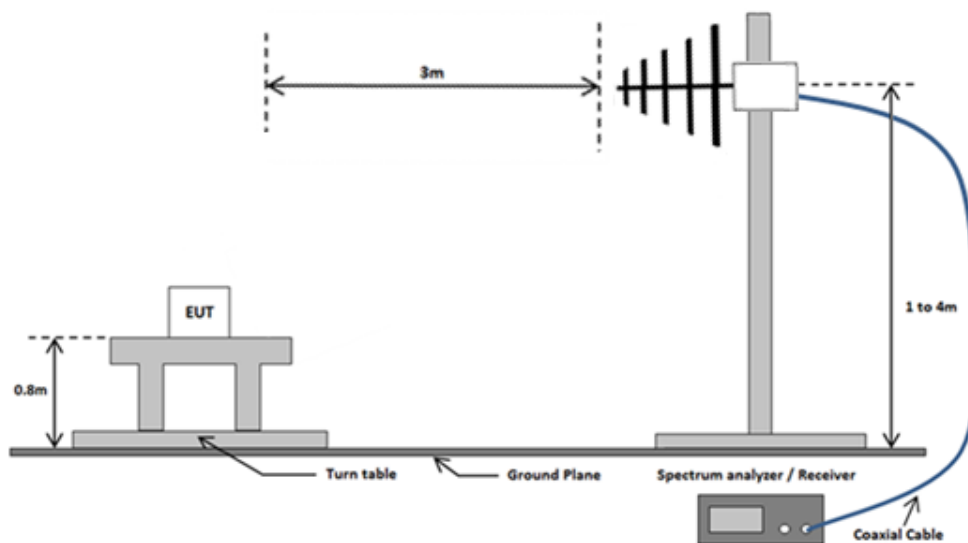


2.2.2 Radiated emissions test setup above 1 GHz

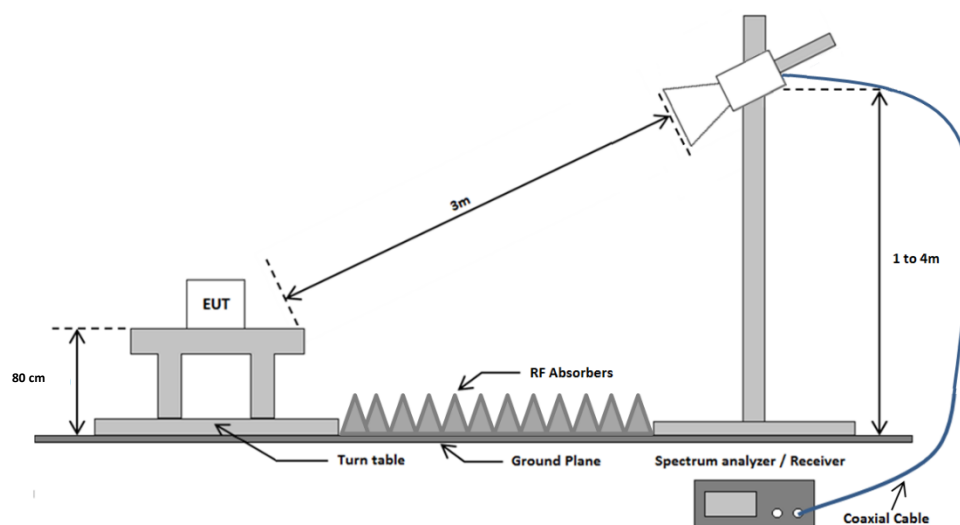

2.2.3 AC Power line conducted emissions test setup

Emissions test at AC mains

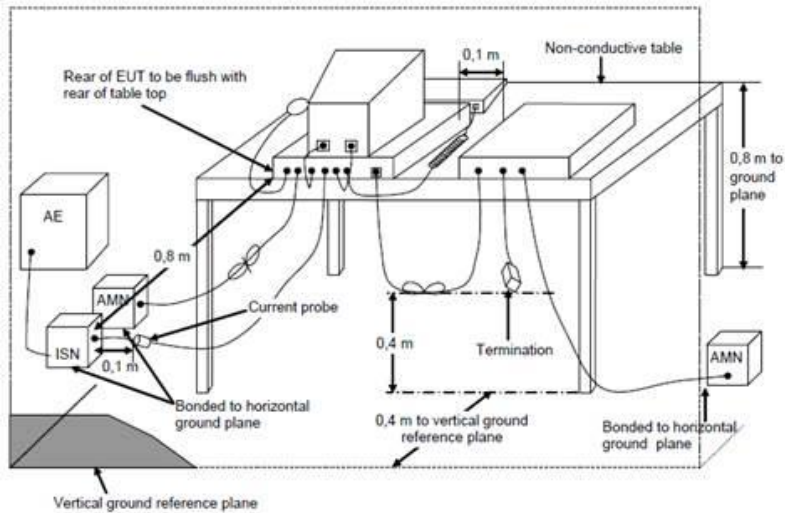

List of used cables					
Number	Function	From	To	Length	Remarks
1	AC/DC Power adaptor	mains 24Vac 60 Hz	EUT	< 3m	-

2.3 Test methodology.

The test methodology used is based on the requirements of 47 CFR Part 15, sections 15.31, 15.107 and 15.109, ICES-003 and ICES-Gen. The test methods, which have been used, are based on ANSI C63.4-2014.

2.4 Equipment modifications.

No modifications have been made to the equipment.

2.5 Equipment used in the test configuration

Description	Manufacturer	Model	ID	Cal. Done date	Cal. due date	Used at Par.
EMI Receiver	Rohde & Schwarz	ESCI	114161	02-2022	01-2024	3.2
EMI Receiver	Rohde & Schwarz	ESR7	114534	01-2022	04-2024	3.1
Biconical antenna + 6dB attenuator	Schwarzbeck + HP	VHA9103 + 8491A	114436 + 114254	03-2021	03-2024	3.1
Logperiodic antenna	EMCO	3147	114385	03-2021	03-2024	3.1
Horn antenna	EMCO	3115	114607	01-2021	01-2024	3.1
Preamplifier 1-18 GHz	µComp Nordic	MCNA-40-0010800-25-10P	114690	01-2022	01-2023	3.1
Test software	Raditeq	Radimation Version 2021.1.9	TE 02008	--	--	3.1/3.2
LISN /Two line V-network	Rohde & Schwarz	ENV 216	114379	07-2021	07-2023	3.2

*Note: Standard gain horn antennas do not need calibration

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2017 has been confirmed before testing.

NA= Not Applicable

2.6 Sample calculations

All formulas for data conversions and conversion factors are reported in chapter 4 of this test report.

3 Test results

3.1 Radiated spurious emissions

3.1.1 Limit

Except for Class A digital devices, the field strength of radiated emissions from an unintentional radiator shall not exceed the field strength levels specified in the following tables.

On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified.

Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function.

When average radiated emission measurements are specified in this part, there is also a limit on the peak level of the emissions. Unless otherwise specified, the limit on peak emissions is 20 dB above the average limit.

The product under test shall comply with both the average and the peak limits.

ICES-003 Issue 7 section 3.2.2

The quasi-peak limits for the electric component of the radiated field strength emitted from ITE or digital apparatus, within 30 MHz to 1 GHz, for a measurement distance of 3m are presented in table below.

At and above 1 GHz, except for outdoor units of home satellite receiving systems, the ITE or digital apparatus shall comply with the limits specified in table below up to the frequency F_M , which shall be determined. The product under test shall comply with both the average and the peak limits.

FCC 15.109(a)

Frequency (MHz)	Field strength ($\mu\text{V}/\text{meter}$)	Field strength (dB $\mu\text{V}/\text{m}$)	Measurement distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

ICES-003 tables 2, 4

Frequency (MHz)	Field strength ($\mu\text{V}/\text{meter}$)	Field strength (dB $\mu\text{V}/\text{m}$)	Measurement distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-230	200	46.0	3
230 -960	224	47.0	3
Above 960	500	54.0	3

3.1.2 Measurement instruments

The measurement instruments are listed in chapter 2.5 of this report.

3.1.3 Test setup

The test setup is as shown in chapter 2.2.1 and 2.2.2 of this report.

3.1.4 Test procedure

30 MHz to 26.5 GHz: According to ANSI C63.4-2014, section 8.3

30 MHz to 1 GHz: IRN 441 – Method 1

1 GHz to 18 GHz: IRN 441 – Method 2

18 to 26.5 GHz: IRN 441– Method 3

In case of handheld and/or body-worn equipment, the EUT's orientation (X, Y, Z) was varied in order to ensure that maximum emission amplitudes were attained. In all other cases the associated cabling and the EUT orientation was varied for maximum emissions.

The spectrum was examined from 30MHz to the highest measurement frequency according to the table below. Final radiated emission measurements were made at 3m distance.

Highest internal frequency (F_X) ⁱ	Highest measurement frequency (F_M)
$F_X \leq 108$ MHz	1 GHz
108 MHz $< F_X \leq 500$ MHz	2 GHz
500 MHz $< F_X \leq 1$ GHz	5 GHz
$F_X > 1$ GHz	$5 \times F_X$ up to a maximum of 40 GHz
i. F_X is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.	


The 6 highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit.

3.1.5 Measurement Uncertainty

Frequency range	Polarization	Uncertainty
30 – 200 MHz	Horizontal	± 4.5 dB
	Vertical	± 5.4 dB
200 -1000 MHz	Horizontal	± 3.6 dB
	Vertical	± 4.6 dB
1 – 18 GHz	Horizontal	± 5.7 dB
	Vertical	± 5.7 dB
18 – 26.5 GHz	Horizontal	± 4.9 dB
	Vertical	± 4.9 dB


3.1.6 Plots of the Radiated Spurious Emissions Measurement

Plot 1a: radiated emissions of the EUT, Antenna horizontal, in the range 30 – 250 MHz (pre-scan peak values shown).

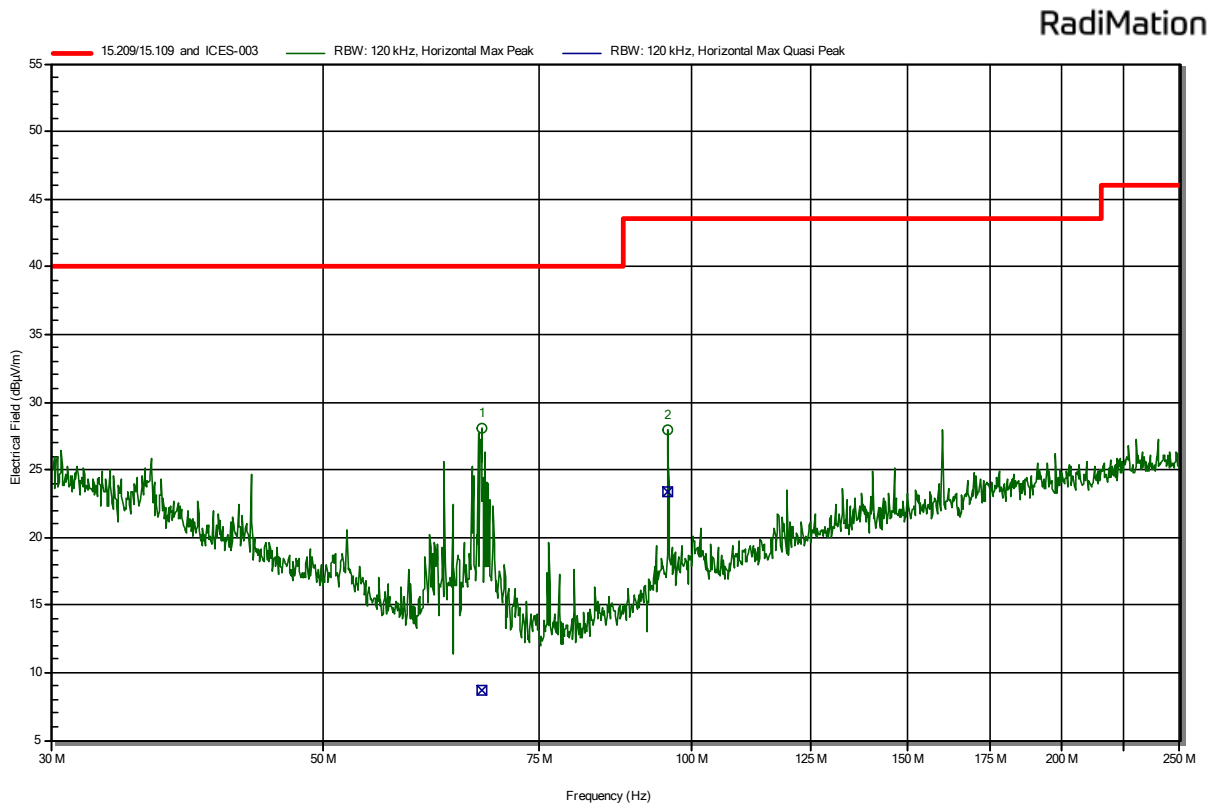


Peak Number	Frequency	Peak	Status	Polarization	Quasi-Peak	Quasi-Peak Limit
1	67,315 MHz	28,1 dBµV/m	Pass	Horizontal	8,7 dBµV/m	40 dBµV/m
2	95,605 MHz	28 dBµV/m	Pass	Horizontal	23,4 dBµV/m	43,5 dBµV/m

Plot 1b: radiated emissions of the EUT, Antenna vertical, in the range 30 – 250 MHz (pre-scan peak values shown).

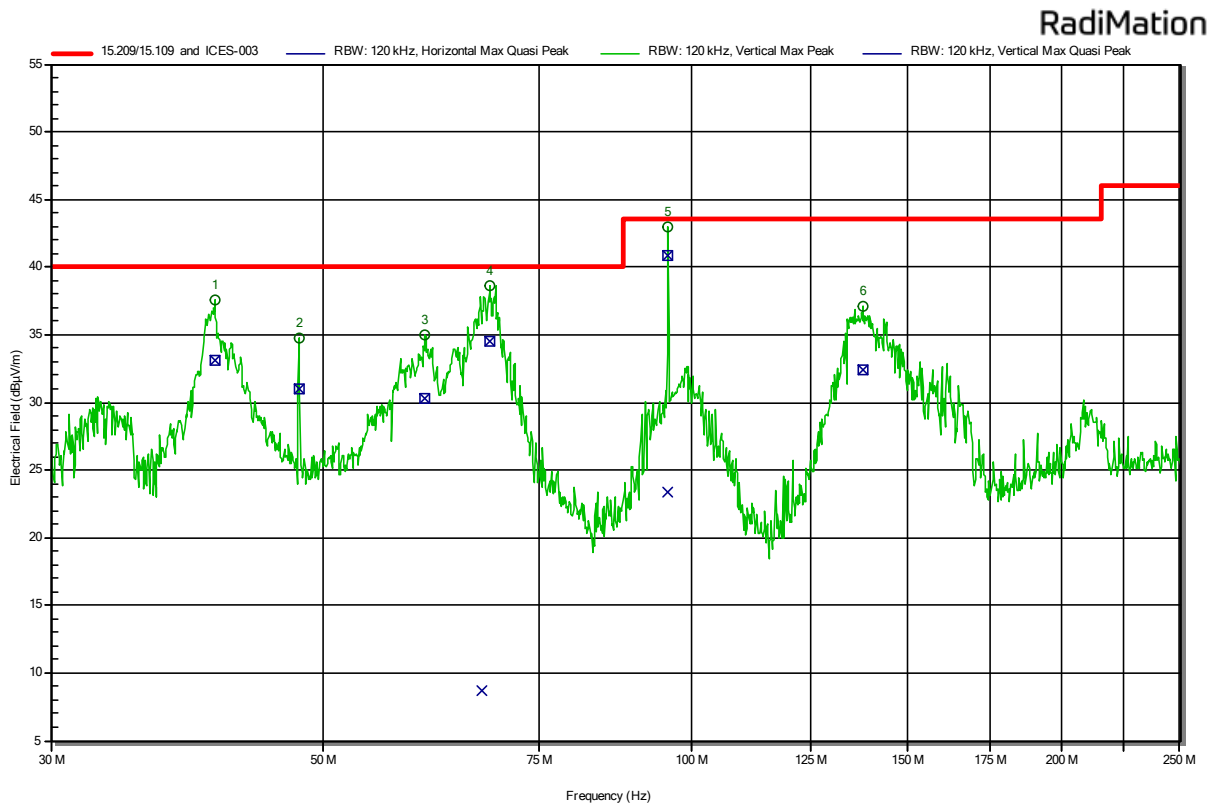


Peak Number	Frequency	Peak	Status	Polarization	Quasi-Peak	Quasi-Peak Limit
1	40,813 MHz	37,6 dBµV/m	Pass	Vertical	33,1 dBµV/m	40 dBµV/m
2	47,791 MHz	34,7 dBµV/m	Pass	Vertical	31 dBµV/m	40 dBµV/m
3	60,607 MHz	35 dBµV/m	Pass	Vertical	30,3 dBµV/m	40 dBµV/m
4	68,327 MHz	38,6 dBµV/m	Pass	Vertical	34,5 dBµV/m	40 dBµV/m
5	95,58 MHz	43 dBµV/m	Pass	Vertical	40,8 dBµV/m	43,5 dBµV/m

Plot 2a: radiated emissions of the EUT, Antenna horizontal, in the range 250 – 1000 MHz
(pre-scan peak values shown).

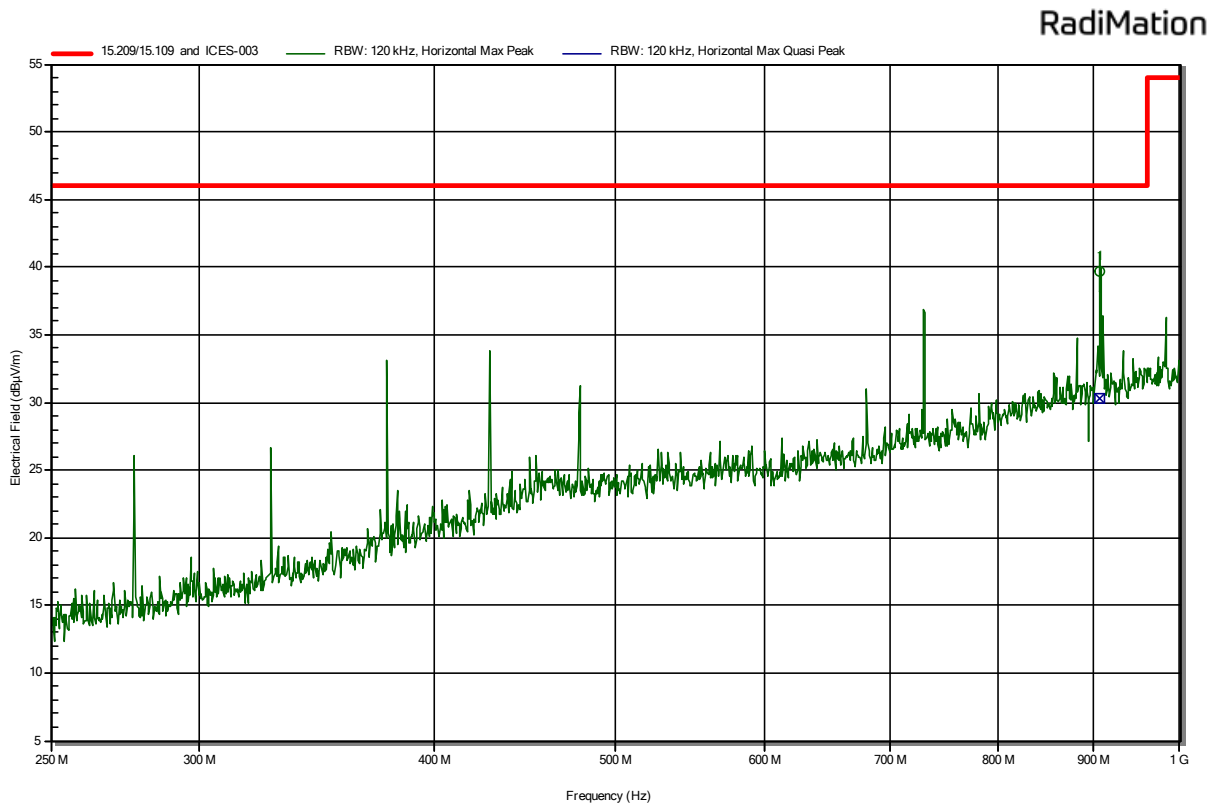


Peak Number	Frequency	Peak	Status	Polarization	Quasi-Peak	Quasi-Peak Limit
1	906,789 MHz	39,7 dBµV/m	Pass	Horizontal	30,2 dBµV/m	46 dBµV/m

Plot 2b: radiated emissions of the EUT, Antenna vertical, in the range 250 – 1000 MHz
(pre-scan peak values shown).

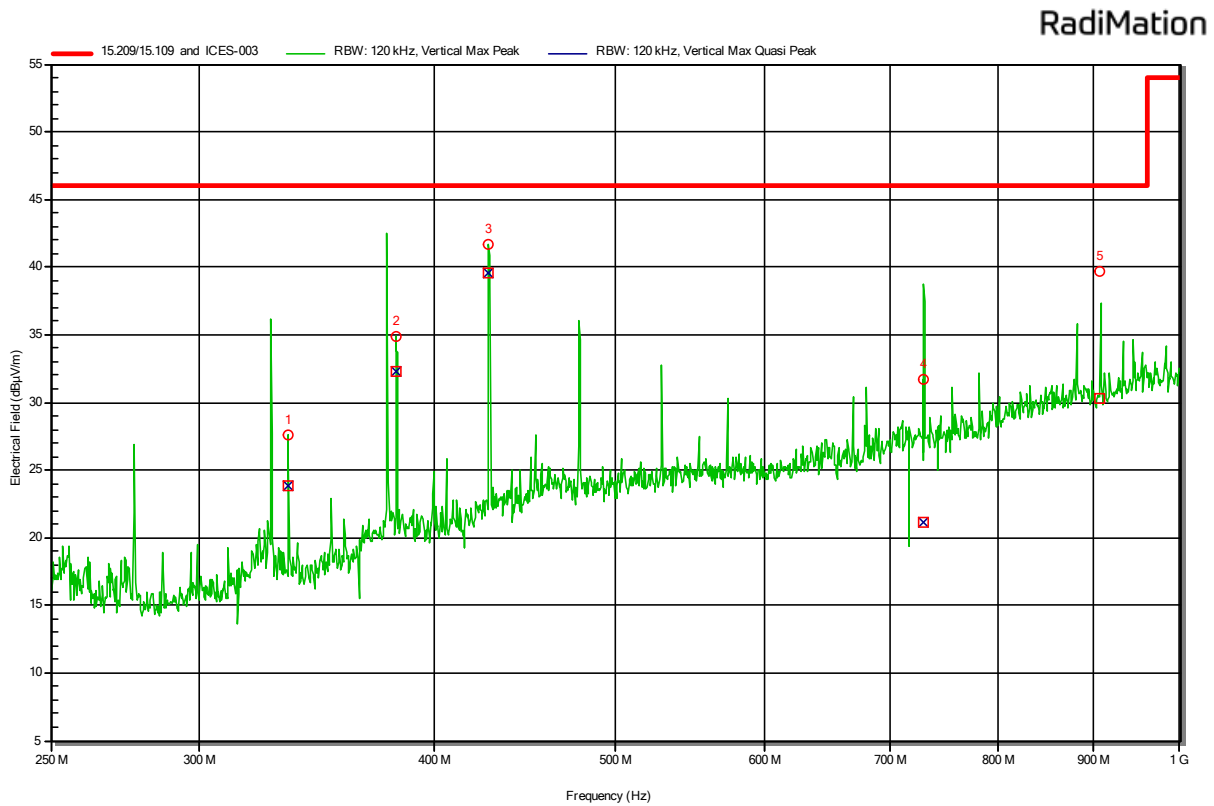


Peak Number	Frequency	Peak	Status	Polarization	Quasi-Peak	Quasi-Peak Limit
1	334,509 MHz	27,7 dBµV/m	Pass	Vertical	23,8 dBµV/m	46 dBµV/m
2	382,304 MHz	34,9 dBµV/m	Pass	Vertical	32,3 dBµV/m	46 dBµV/m
3	428,154 MHz	41,6 dBµV/m	Pass	Vertical	39,6 dBµV/m	46 dBµV/m
4	730,024 MHz	31,7 dBµV/m	Pass	Vertical	21,2 dBµV/m	46 dBµV/m

Plot 3a: radiated emissions of the EUT, Antenna horizontal, in the range 1-6 GHz
(peak + worst case Average value shown).

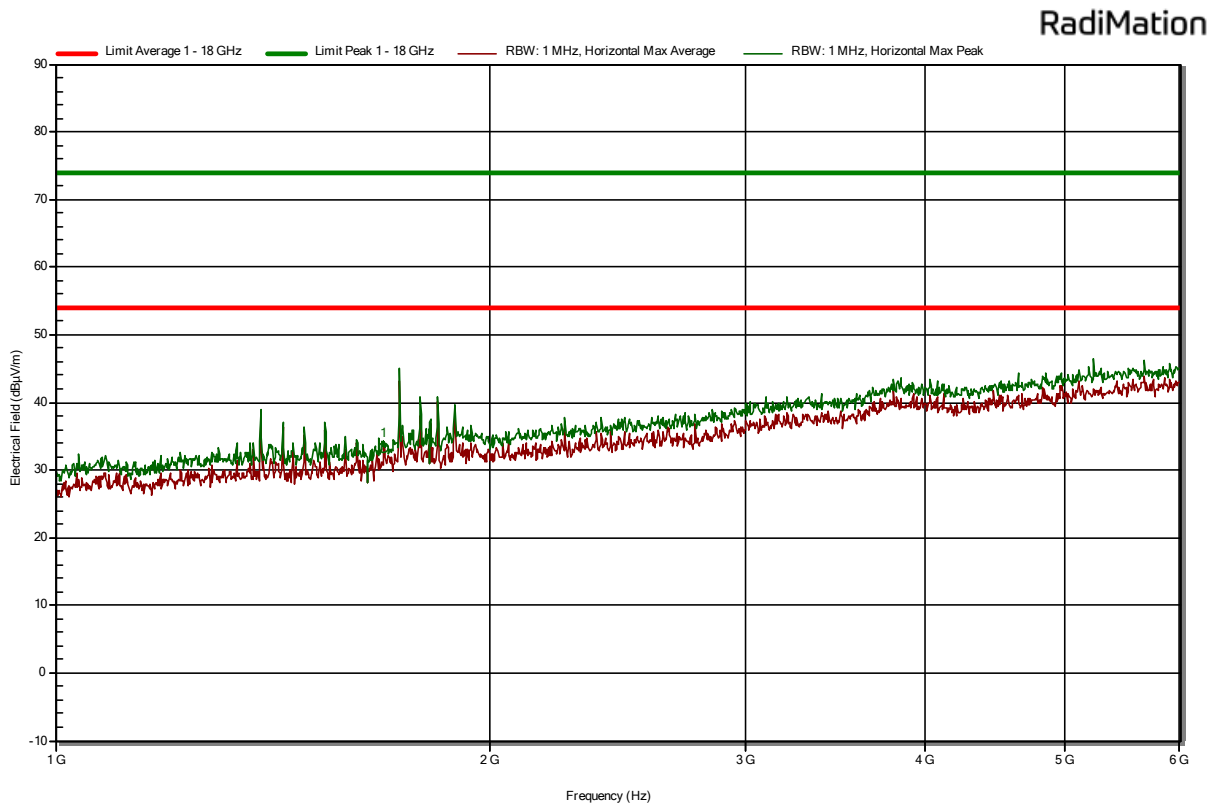

Peak Number	Frequency	Average	Status	Polarization
1	1,687 GHz	33,4 dBµV/m	Pass	Horizontal

Plot 3a: radiated emissions of the EUT, Antenna vertical, in the range 1-6 GHz
(peak + worst case Average value shown).

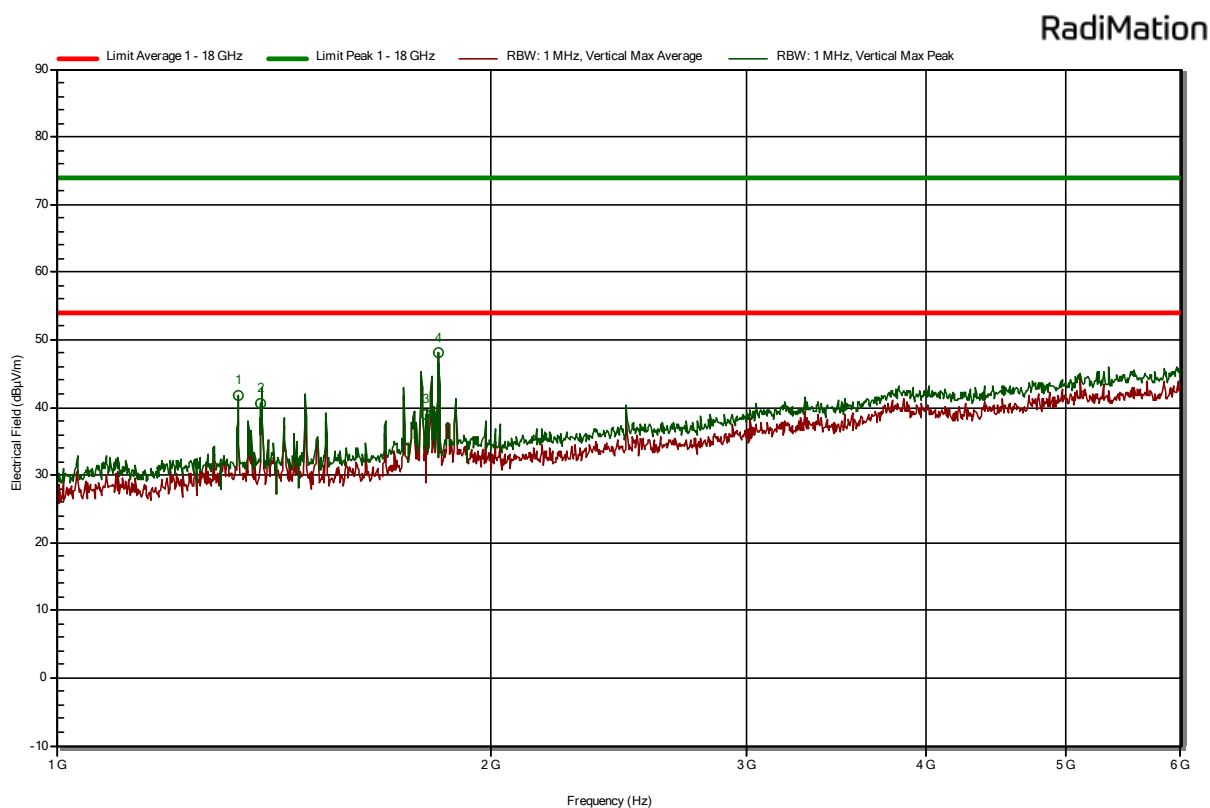

Peak Number	Frequency	Average	Status	Polarization
1	1,335 GHz	41,8 dBµV/m	Pass	Vertical
2	1,385 GHz	40,5 dBµV/m	Pass	Vertical
3	1,803 GHz	38,9 dBµV/m	Pass	Vertical
4	1,838 GHz	48,2 dBµV/m	Pass	Vertical

3.2 AC Power-line conducted emissions

3.2.1 Limit

§ 15.107 (a)

Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

ICES-003 Issue 7 section 3.2.1

The ITE or digital apparatus shall comply with the conducted emission limits specified in table below at its AC mains power terminals. The product under test shall comply with both the quasi-peak and the average limits.

Where the product under test is powered through an external device (for example, through an external power supply, or by means of a device providing power over Ethernet to the product under test), the conducted emission limits apply at the AC mains power terminals of the external device, while this is powering the product under test: see ICES-Gen.

Frequency of Emission (MHz)	Conducted Limit (dB μ V) Quasi-Peak	Conducted Limit (dB μ V) Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 - 30	46	50

*Decreases with the logarithm of the frequency.

3.2.2 Measurement instruments

The measurement instruments are listed in chapter 2.5 of this report.

3.2.3 Test setup

The test setup is as shown in chapter 2.2.3 of this report.

3.2.4 Test procedure

According to ANSI C63.4: 2014, section 13.3

IRN 439 – Method 1

3.2.5 Test results and plots of the AC power-line conducted measurement


See next page.

3.2.6 Measurement uncertainty

+/- 3.6 dB

3.2.7 Plots of the AC mains conducted spurious measurement


Pre-scan plot with peak detector of the AC Power-line Conducted emissions on Phase

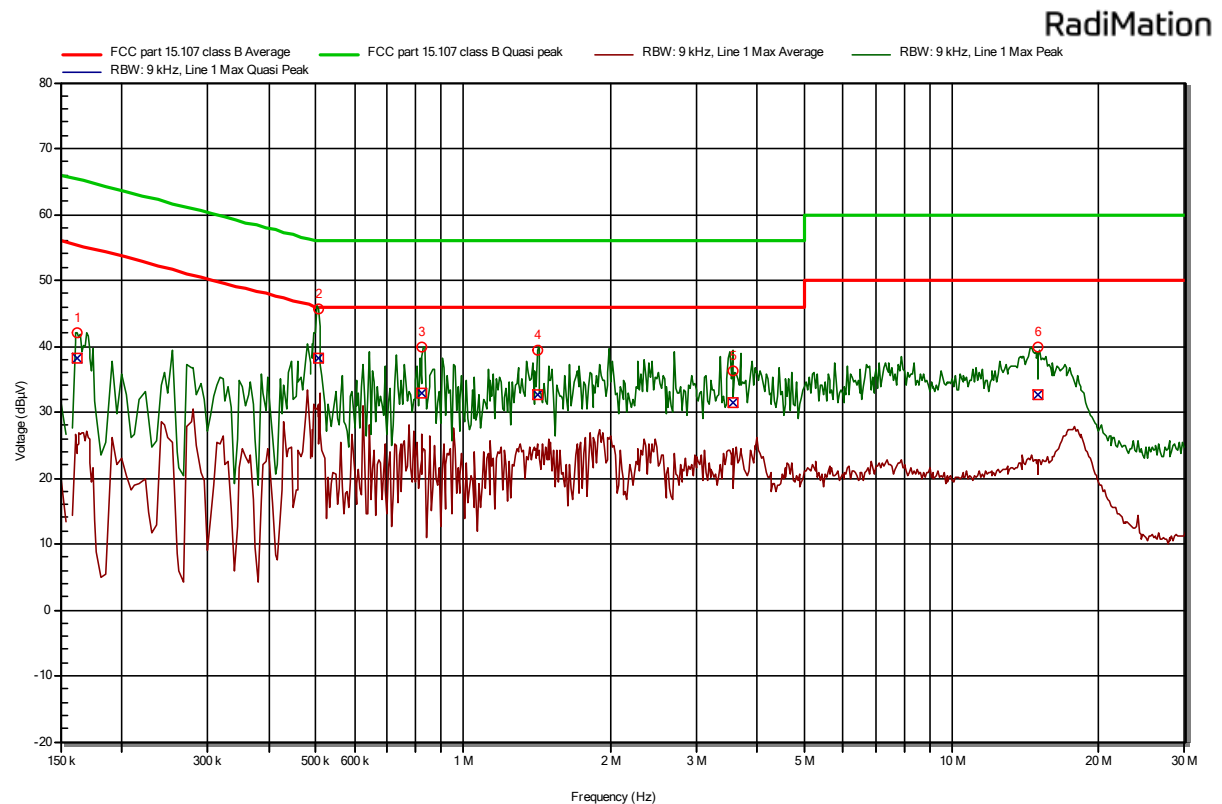

Peak Number	Frequency	Peak	Status	Quasi-peak	Quasi-peak Limit
1	162,6 kHz	42 dBµV	Pass	38,2 dBµV	65,3 dBµV
2	505,05 kHz	45,8 dBµV	Pass	38,3 dBµV	56 dBµV
3	824,1 kHz	39,9 dBµV	Pass	32,8 dBµV	56 dBµV
4	1,425 MHz	39,4 dBµV	Pass	32,7 dBµV	56 dBµV
5	3,561 MHz	36,2 dBµV	Pass	31,4 dBµV	56 dBµV
6	15,014 MHz	39,9 dBµV	Pass	32,6 dBµV	60 dBµV

Pre-scan plot with peak detector of the AC Power-line Conducted emissions on **Neutral**

RadiMation

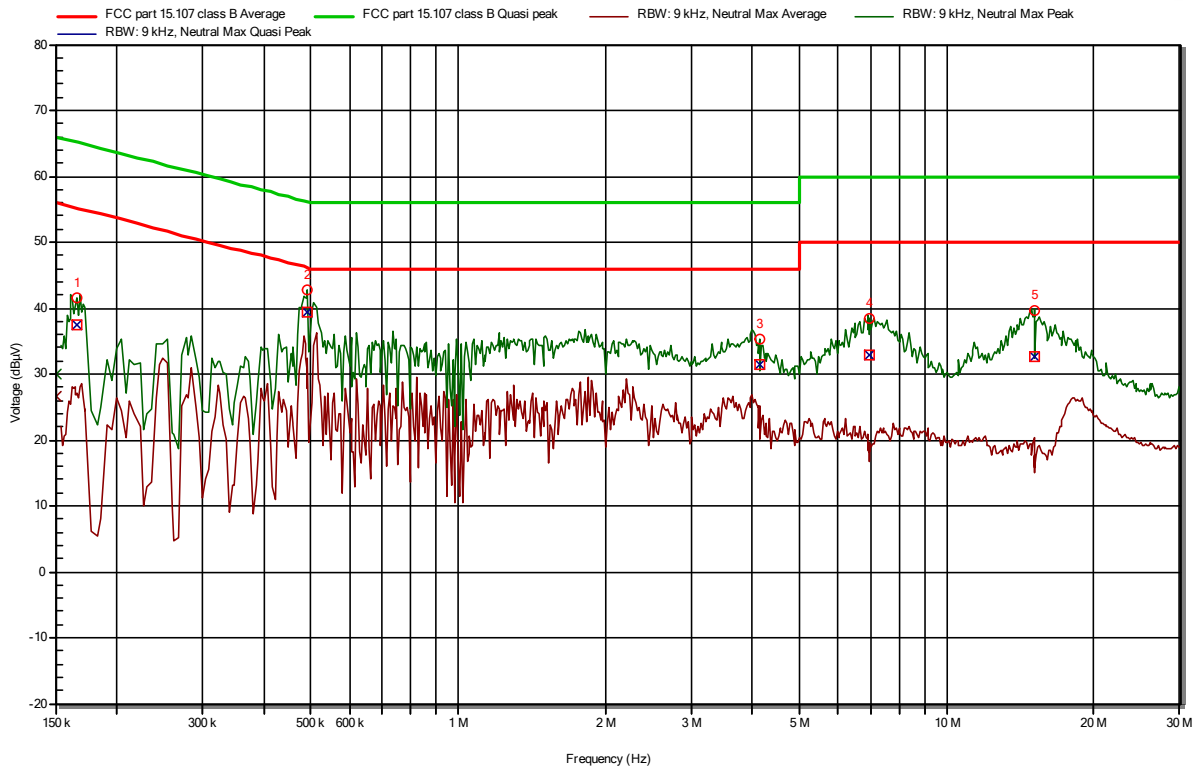

Peak Number	Frequency	Peak	Status	Quasi-peak	Quasi-peak Limit
1	165,75 kHz	41,7 dBµV	Pass	37,4 dBµV	65,2 dBµV
2	489,75 kHz	42,8 dBµV	Pass	39,4 dBµV	56,2 dBµV
3	4,133 MHz	35,4 dBµV	Pass	31,4 dBµV	56 dBµV
4	6,931 MHz	38,4 dBµV	Pass	32,9 dBµV	60 dBµV
5	15,162 MHz	39,6 dBµV	Pass	32,5 dBµV	60 dBµV

4 Sample calculations

All formulas for data conversions and conversion factors are reported in this chapter.

Field Strength Measurement:

$$E \text{ (dB}\mu\text{V/m)} = U \text{ (dB}\mu\text{V)} + AF \text{ (dB/m)} + \text{Corr. (dB)}$$

Where:

E = Electric field strength

U = Measuring receiver voltage

AF = Antenna factor

CL = Cable loss

Corr. = sum of single correction factors of used cable and amplifier (if applicable).

Linear interpolation will be used for frequencies in between the values in the table.

Tables shows an extract of the values.

Frequency (Mhz)	AF (dB/m)	Cable loss (dB)	Corr. (dB)
	Id: 109683 Chase CBL6112B SN: 2408	Id: SAR cable	
30	25,4	0,68	26,1
100	16,8	1,15	18,0
150	16,8	1,41	18,2
200	15,3	1,63	16,9
250	19,3	1,93	21,2
300	13,3	2,12	15,4
350	14,6	2,20	16,8
400	22,0	2,29	24,3
450	23,0	2,53	25,5
500	23,8	2,67	26,5
550	25,4	2,90	28,3
600	24,8	3,02	27,8
650	25,2	3,09	28,3
700	25,0	3,22	28,2
750	25,8	3,56	29,4
800	25,8	3,69	29,5
900	26,5	3,81	30,3
950	27,0	3,91	30,9
1000	27,4	4,30	31,7

Frequency (MHz)	AF (dB/m)	Gain (dB)	Cable loss (dB)	Corr. (dB)
	TE 00531 Emco 3115 SN: 9412-4377	TE 11132 Miteq JS4-18004000-30-8P-A1	TE 01315	
1000	23,6	40,4	2,0	66
1500	25,1	40,5	2,4	68
2000	27,1	40,5	2,7	70,3
2500	28,6	40,7	3,2	72,5
3000	30,5	40,7	3,2	74,4
3500	31,2	40,7	3,4	75,3
4000	32,7	40,9	4,9	78,5
4500	32,4	40,9	4,4	77,7
5000	33,2	40,7	4,6	78,5
5500	34,0	40,5	4,5	79
6000	34,6	40,0	5,2	79,8
6500	34,3	39,4	5,9	79,6
7000	35,2	38,6	5,7	79,5
7500	36,4	39,2	5,9	81,5
8000	37,0	38,9	6,3	82,2
8500	37,5	38,4	6,4	82,3
9000	38,1	37,4	6,5	82
9500	37,8	37,0	7,1	81,9
10000	38,2	36,5	7,3	82
10500	38,1	36,7	7,6	82,4
11000	38,3	36,9	8,3	83,5
11500	38,5	37,6	8,1	84,2
12000	39,1	38,3	8,4	85,8
12500	38,7	38,5	8,3	85,5
13000	39,2	38,9	9,2	87,3
13500	40,5	40,2	8,3	89
14000	41,1	40,0	8,2	89,3
14500	41,4	40,1	8,2	89,7
15000	40,2	41,4	8,3	89,9
15500	37,9	41,4	8,6	87,9
16000	37,5	42,8	9,2	89,5
16500	38,6	42,3	8,8	89,7
17000	41,1	43,1	9,4	93,6
17500	42,7	43,2	9,4	95,3
18000	44,0	44,2	9,8	98

Frequency (MHz)	AF (dB/m)	Gain (dB)	Cable loss (dB)	Corr. (dB)
	TE 00818 Flann 20240-25 SN: 163703	TE 11131 Miteq JS4-18004000-30-8P-A1	TE 01315	
18000	31,3	26,2	9,8	67,3
19000	31,5	26,1	9,6	67,2
20000	31,7	25,9	11	68,6
21000	31,9	24,3	10,7	66,9
22000	32,1	18,3	10,5	60,9
23000	32,2	18,9	10,8	61,9
24000	32,3	23,6	11,4	67,3
25000	32,4	24,5	11,6	68,5
26000	32,5	25,3	11,7	69,5

5 Photograph test setup

5.1 Photograph test setup Radiated Emissions

Photo 1 Photograph test setup radiated emissions 250-1000 MHz, report section 3.1

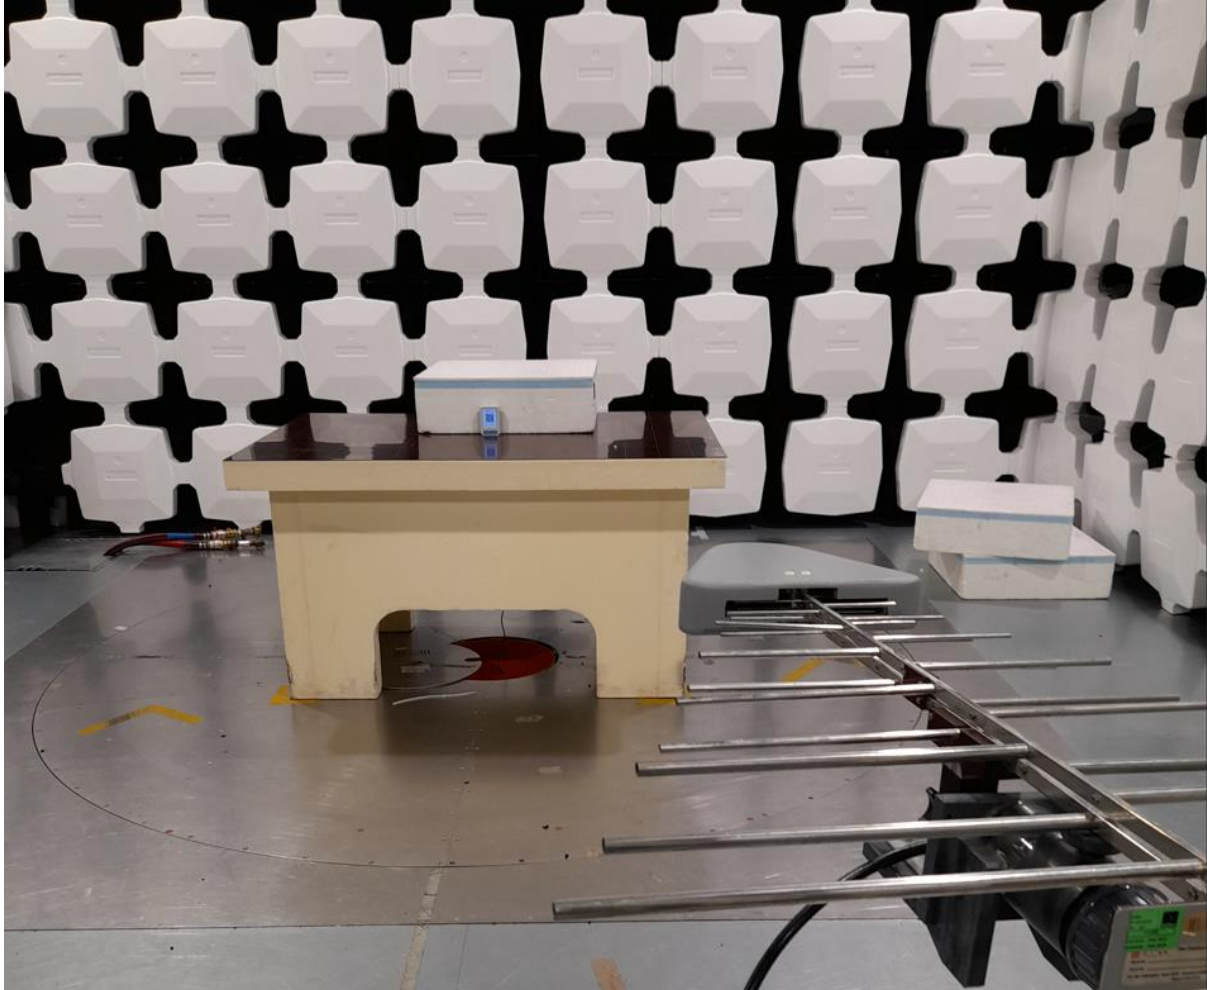


Photo 2 Photograph test setup radiated emissions 1-18 GHz, report section 3.1



<<END OF REPORT>>